



# ONGARD GS | Counter Top Guard Screen System

## Top Fixed Installation Process


### POST INSTALLATION

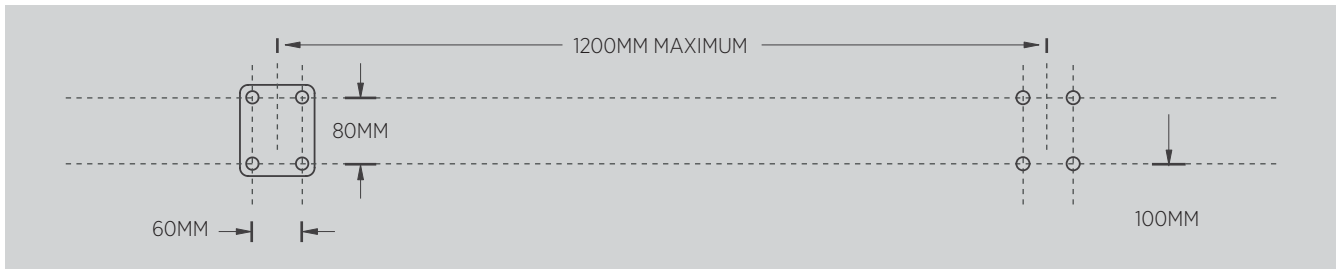


Post should be a minimum of 100mm from the edge of the counter top with a recommended span up to 1200mm

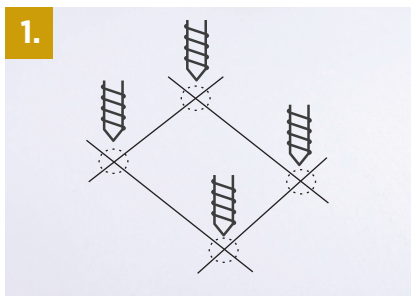

Mark out post fixing points & drill holes.

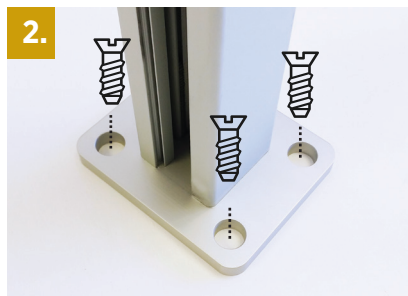

Fix posts to surfaces (fixings not supplied).

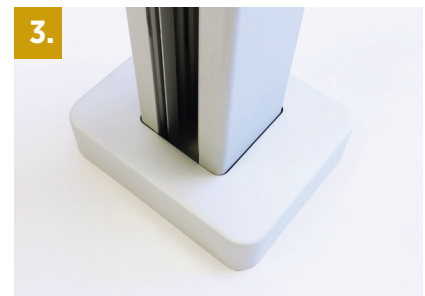

Fit the covers.


### GLASS INSTALLATION



Fit the bottom infill & plastic packing block




Fit back rubber in from the side (larger gasket).

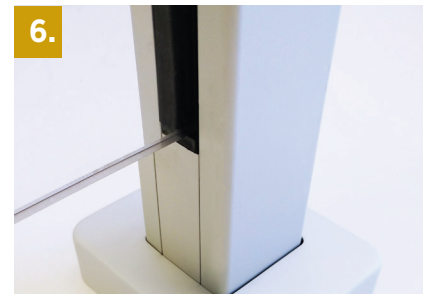

Slide Perspex in from the top between posts.



Fit Perspex retaining rubber (smaller gasket).

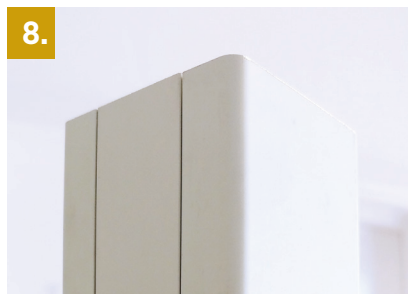

Fit the plastic packing block & infill on the top of Perspex.



Fit top closer cap.

ONGARD GS

T: (0117) 935 3888 / E: sales@regalbalustrades.co.uk  
www.regalbalustrades.co.uk

**Regal Balustrades Ltd**  
Unit 7, Eagles Wood Business Park  
Woodlands Lane, Bradley Stoke,  
Bristol, BS32 4EU

